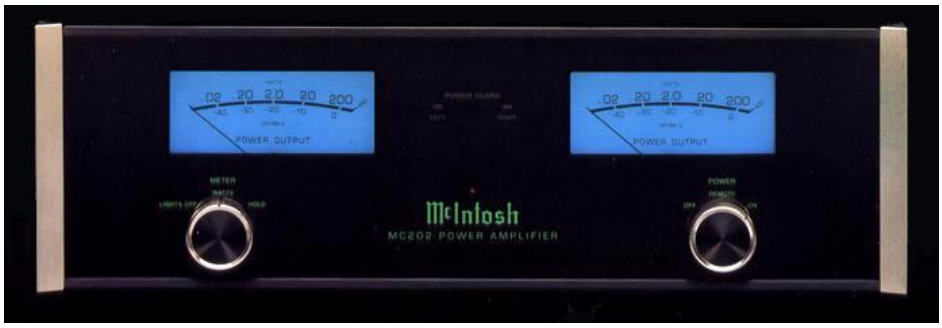

FRONT PANEL: **Glass with illuminated teal/gold nomenclature. Illuminated left and right POWER OUTPUT meters (LINEAR WATTS or DECIBELS). Left and right POWER GUARD lights. 7 METER switch: LIGHTS OFF, WATTS or HOLD. Remote ON indicator. POWER switch: OFF, REMOTE or ON.**

BACK PANEL: **FUSE. Power cord receptacle. UNBALANCED Left and right/MONO INPUTS. BALANCED right/MONO and Left INPUTS. MODE switch: STEREO or MONO BRIDGED. POWER CONTROL jacks: IN and OUT. 7 RIGHT speaker OUTPUT connectors for 2 Ω, 4 Ω and 8 Ω. LEFT speaker OUTPUT connectors for 2 Ω, 4 Ω and 8 Ω.**

SPECIFICATIONS: **200w/ch into 2, 4 or 8 ohms. *Response:* 20-20kHz (+0 -0.25dB). *Distortion:* 0.005%. *Signal to Noise Ratio:* -115dBA. *Output Impedance:* 2, 4 or 8 ohms, mono bridged: 4, 8 or 16 ohms. *Damping Factor:* >40. *Input Sensitivity:* 1.7v unbalanced, 3.4v balanced. *Dynamic Headroom:* 1.9 dB. *Sentry Monitor*. *Autoformers*. *Power Guard*. *Power Requirements:* 120V at 5 Amps.**

MC 202 - **Sold from 2000 - 2003. S/N: RY1001~RY????**

Size: **5-3/8"H, 17-1/2"W and 17-1/2"D.** ***Weight:*** **65 lb.** ***$3,300.00***